



A.H. Systems, Inc.

9710 Cozycroft Ave.
Chatsworth, CA 91311



Tel: (818) 998-0223



sales@AHSystems.com

Fax: (818) 998-6892



www.AHSystems.com

SAS-564

Passive Loop Antenna

1 KHz – 30 MHz

The rugged design makes this Loop Antenna excellent for low frequency, magnetic field testing.



Frequency Range: 1 kHz – 30 MHz
Max. Continuous Input: 500 Watts
Connector: N, Female
Mounting Base: ¼ x 20 Thread, Female

Features

- Broad Frequency Range of 1 KHz to 30 MHz
- Individually Calibrated
- Three Year Warranty

A.H. Systems' designs manufactures and delivers high performance Loop Antennas for a wide range of magnetic field testing. Whether used in a set to measure shielding effectiveness per IEEE 299, MIL-STD 285 and NSA 65-6, or individually to satisfy specific requirements, the Loop Antenna is an efficient, low cost solution.

Recommended Accessories

- SAS-563B (Active Shielded loop Antenna)
- ATU-510 (Antenna Tripod, wooden)



A.H. Systems, Inc.

9710 Cozycroft Ave.
Chatsworth, CA 91311



Tel: (818) 998-0223
Fax: (818) 998-6892

◆ sales@AHSystems.com
◆ www.AHSystems.com



A.H. Systems, inc.

9710 Cozycroft Ave.
Chatsworth, CA 91311


818.998.0223 fax 818.998.6892

sales@AHSystems.com www.AHSystems.com



Calibration, Passive Loop Antenna

Model Number: SAS-564

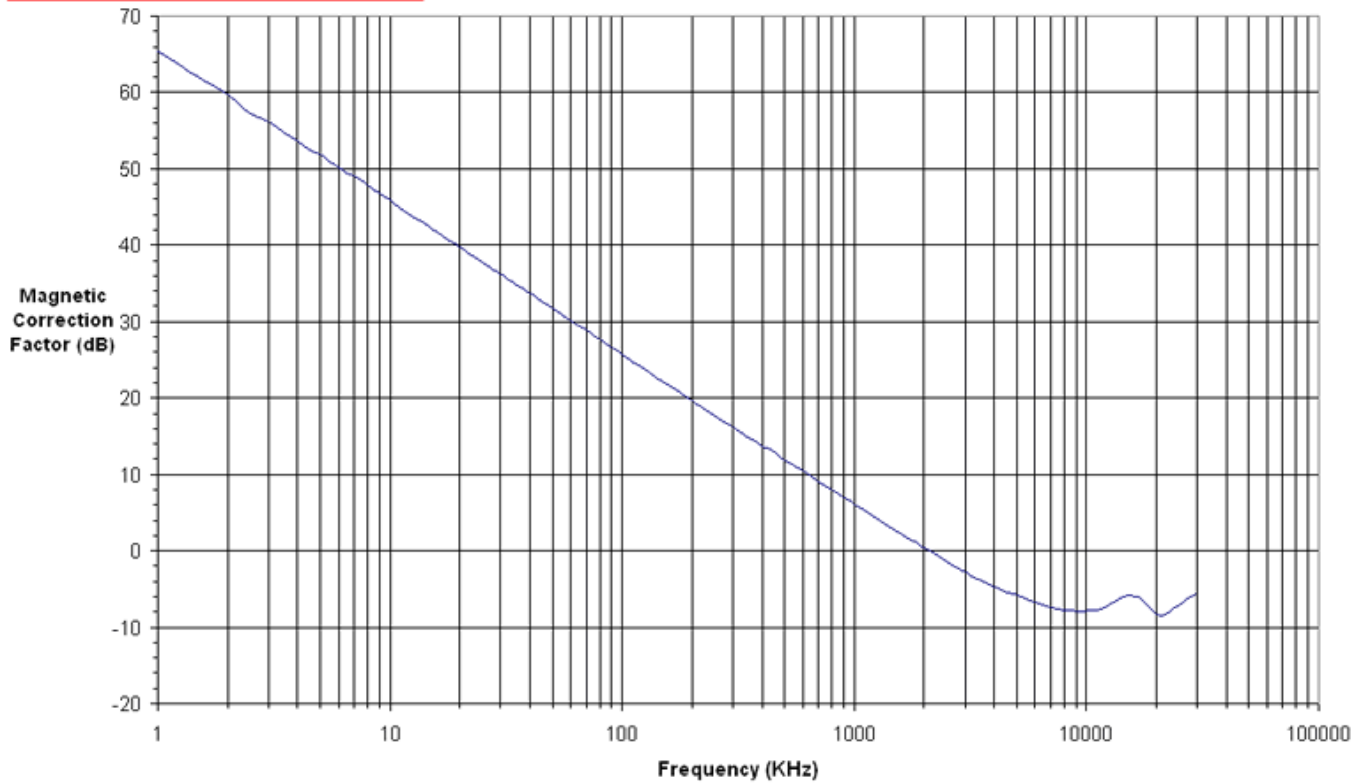

Physical Dimensions

Loop Diameter: 12 in. (30.5 cm)

Weight: 1.9 lb.'s (0.86 kg)