Tel: (818) 998-0223 Fax: (818) 998-6892 sales@AHSystems.com www.AHSvstems.com

SAS-583-10 Standard Gain Horn Antenna 3.95 GHz - 5.85 GHz

This Standard gain horn antenna has medium gain, low VSWR, and a constant antenna factor: excellent for both immunity and emissions testing.



Frequency Range: 3.95 GHz - 5.85 GHz

Gain: 10 dBi

Maximum Continuous 250 Watts

Power:

Beamwidth E-plane: 55° Beamwidth H-plane: 54° Impedance: 50Ω

VSWR: 1.35:1 (1.6:1 max)

Connector: WR-187 to N-Type female adapter

Features

- Frequency Range of 3.95 GHz to 5.85 GHz
- Linearly Polarized High Gain, Low VSWR
- Individually Calibrated at 1 Meter Horizontal Polarity
- Attached Tripod Mount for Horizontal and Vertical Mounting
- Three year Warranty

The Standard Gain Horn Antennas are designed specifically for utilization in emissions and immunity testing over the frequency range of 1 to 40 GHz. Each antenna is linearly polarized and has medium gain, low VSWR, and a constant antenna factor. The Standard Gain Horn performance is very precise and predictable through design parameters. Comparisons of measured versus computed antenna factors and gain have been shown to be +/- .5 dB. Therefore, the antenna is considered to be a standard reference, similar to that of a resonant dipole below 1 GHz. The coax-to-waveguide adapter is the only power-limiting component on the antenna and can be removed if high fields are desired. Each Standard Gain Horn comes with a tripod mount that adapts to any tripod with 1/4-20 male threads. Horizontal and vertical polarization is obtained by rotating the antenna on the tripod.

Recommended Accessories

- ATU-510 (Antenna Tripod Unit, Wooden)
- AEH-510 (Azimuth and Elevation Head)
- SAC-18G-3 (3 Meter Low Loss Cable)



Tel: (818) 998-0223 Fax: (818) 998-6892 sales@AHSystems.com www.AHSystems.com

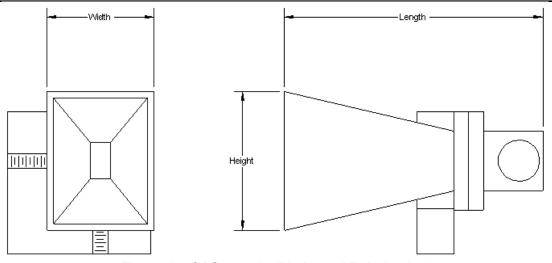


Figure 1 – SAS-583-10 (Horizontal Polarization)

Physical Dimensions:

Length: 7.0 in. (17.78 cm) Width: 2.12 in. (5.38 cm) Height: 2.89 in. (7.34 cm) Weight: 2.1 lb.'s (952 g)