

Tel: (818) 998-0223 Fax: (818) 998-6892 sales@AHSystems.com www.AHSystems.com

SAS-588 Standard Gain Horn Antenna 26.5 GHz – 40 GHz

This Standard gain horn antenna has medium gain, low VSWR, and a constant antenna factor; excellent for both immunity and emissions testing.



 $\begin{array}{rll} \mbox{Frequency Range:} & 26.5 \mbox{ GHz} - 40 \mbox{ GHz} \\ \mbox{Antenna Factor:} & 46 \mbox{ dB/m} \\ \mbox{Gain:} & 14.6 \mbox{ dBi} \\ \mbox{Maximum Continuous} \\ \mbox{Power:} & 10 \mbox{ Watts} \\ \mbox{Max Radiated Field:} & 100 \mbox{ V/m} \\ \mbox{Beamwidth E-plane:} & 31^{\circ} \\ \mbox{Beamwidth H-plane:} & 30^{\circ} \\ \mbox{Impedance:} & 50 \mbox{ } \Omega \\ \mbox{VSWR:} & 1.3:1 \mbox{ (1.5:1 max)} \\ \mbox{Connector:} \mbox{ WR-28 to 2.9mm-Type female adapter} \end{array}$ 


## Features

- Frequency Range of 26.5 GHz to 40 GHz
- Linearly Polarized High Gain, Low VSWR
- Individually Calibrated at 1 Meter Horizontal Polarity
- Attached Tripod Mount for Horizontal and Vertical Mounting
- Three year Warranty

The Standard Gain Horn Antennas are designed specifically for utilization in emissions and immunity testing over the frequency range of 1 to 40 GHz. Each antenna is linearly polarized and has medium gain, low VSWR, and a constant antenna factor. The Standard Gain Horn performance is very precise and predictable through design parameters. Comparisons of measured versus computed antenna factors and gain have been shown to be +/- .5 dB. Therefore, the antenna is considered to be a standard reference, similar to that of a resonant dipole below 1 GHz. The coax-to-waveguide adapter is the only power-limiting component on the antenna and can be removed if high fields are desired. Each Standard Gain Horn comes with a tripod mount that adapts to any tripod with ½-20 male threads. Horizontal and vertical polarization is obtained by rotating the antenna on the tripod.

## **Recommended Accessories**

- ATU-510 (Antenna Tripod Unit, Wooden)
- AEH-510 (Azimuth and Elevation Head)
- SAC-40G-1.5 (1.5 Meter Low Loss Cable)

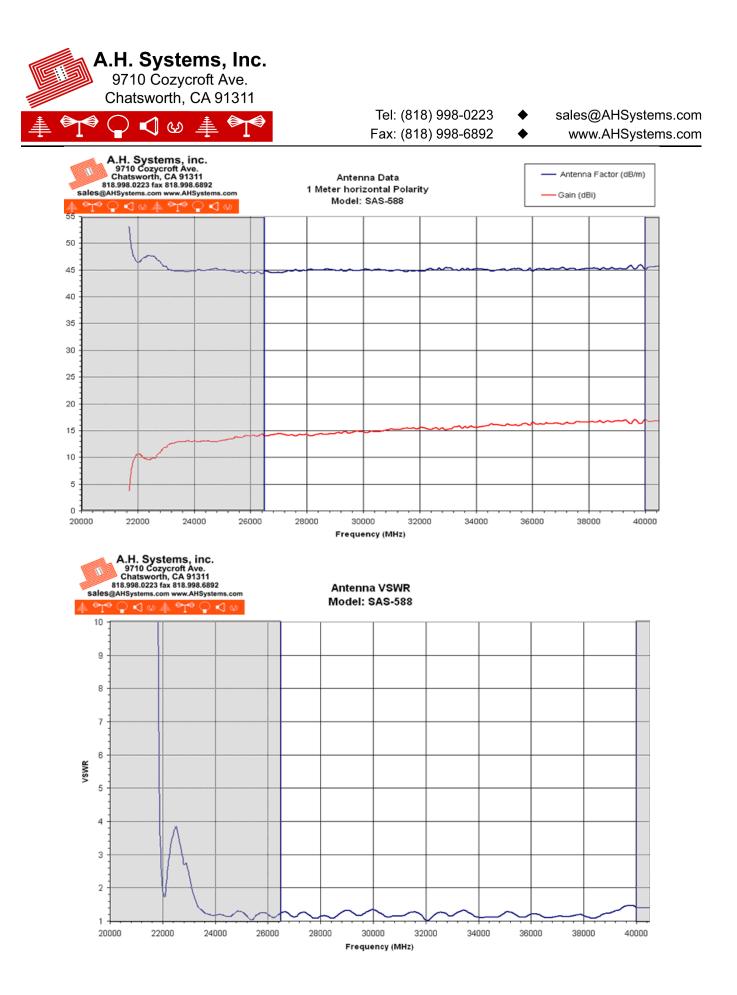



## 

sales@AHSystems.com www.AHSystems.com

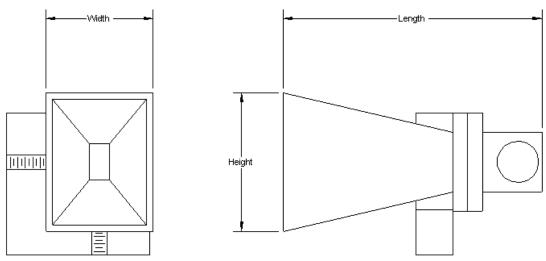


Figure 1 – SAS-588 (Horizontal Polarization)

## **Physical Dimensions:**

Length:2.9 in. (7.37 cm) Width:0.6 in. (1.52 cm) Height:0.9 in. (2.29 cm) Weight:0.1 lb.'s (0.05 kg)