

This manual explains how to use additional option licenses to add options to a SL2000 High-Speed Data Acquisition Unit. To ensure correct use, please read this manual thoroughly before beginning operation.

Contents of the Package

The following items are included in the package. If the wrong items have been delivered or if items are missing, contact your nearest YOKOGAWA dealer.

Item	Description	Quantity
Product Information Sheet	Contains the model and suffix code of the option license, the license key, and the instrument number of the SL2000 that the option is to be added to. To add the option to the relevant product, the license key written on this sheet is necessary. Keep this sheet in a safe place.	1 sheet
Suffix Code Label	A label that proves that the option has been added to the relevant product. After adding the option, be sure to affix this label on the relevant product.	1 sheet
User's Manual	This manual.	1 sheet

Products That Options Can Be Added To

The options that you purchase can be added to SL2000.

Models	SL2000*
Firmware version	Version supporting the option to be added

* The /G05 option can be added only to models with the /G03 Option (/G03 option is changed to /G05 option).
The /MT1 option can be added only to models with the /G05 Option (/G05 option is changed to /MT1 option).

Installing an Option

Checking the Product That the Option Will Be Added To


1. Check that the instrument number of the SL2000 that you want to add the option to matches the instrument number written on the Product Information sheet.
If the instrument number does not match, the option will not be added even if the correct license key is entered in the steps described below.

Starting the SL2000


2. Turn on the SL2000 power switch to start the SL2000.
For details on how to turn on the power switch, see in the SL2000 Getting Started Guide (IM SL2000-03EN).

Adding an Option

3. Press the ◀/▶ arrow keys on the front panel several times to display the Setup screen.
4. Press the ▲/▼ arrow keys to select Upgrade, and press SET.
5. Press the ▲/▼ arrow keys to select Enter License Key, and press SET. A screen appears for entering a license key.

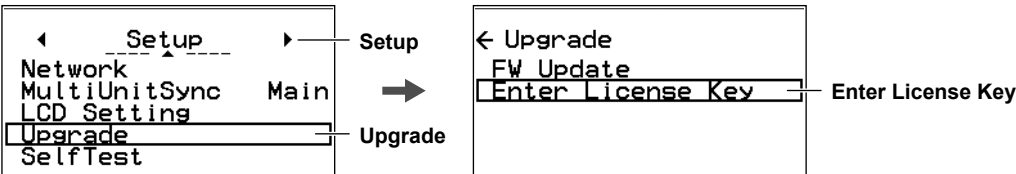


6. Press the ◀/▶/▲/▼ arrow keys to enter the license key correctly.
 - Press the ◀/▶ arrow keys to move the cursor and the ▲/▼ arrow keys to enter alphanumeric characters and symbols.
 - The license key is written on the Product Information sheet.

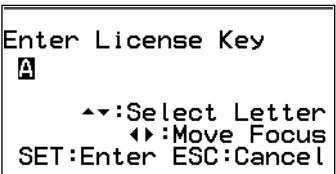

7. After entering the license key, press **SET**. The additional option will be installed.

When the option is installed successfully, the following screen appears.

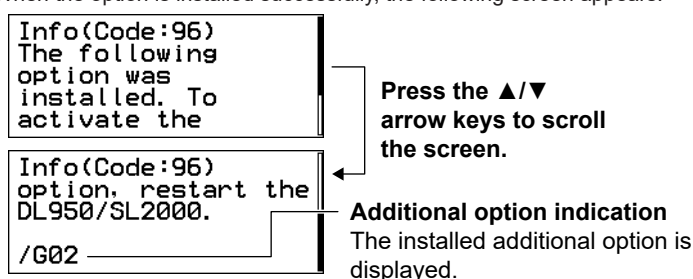

CAUTION

Do not turn off the SL2000 until the above message appears after pressing SET.

If the SL2000 is turned off during this period, the SL2000 may no longer start, or option and other information may be lost.

If the above message does not appear, check the following items.

- If the instrument number of the SL2000 that you are trying to add the option to does not match the instrument number written on the Product Information sheet, you cannot install the option.
- If the instrument number matches, enter the correct license key again.
- If the above message does not appear even though the instrument number matches and the license key is entered correctly, contact your nearest YOKOGAWA dealer.

Restarting the SL2000

8. Restart the SL2000. The additional option will be activated.

Note

If you are controlling the SL2000 using the IS8000 or Web server feature or if you have a monitor connected to the SL2000, you can use the menu displayed on the waveform display screen to add options or view the overview screen. For details on control using the waveform display screen, see the User's Manual, IM DL950-02EN.

Viewing the System Information

To verify that the option has been added, view the system information on the SL2000 overview screen.


Press the ◀/▶ arrow keys on the front panel several times to display the Overview screen.

Note

The SUFFIX (suffix code) inscribed in the SL2000 name plate indicates the installed options at the time of factory shipment. After adding options, check the options on the SL2000 overview screen.

Affixing the Suffix Code Label

Be sure to affix the suffix code label (included with the Product Information sheet) to the SL2000 that you have added an option to. Before affixing the label, wipe the surface clean with a clean dry cloth.

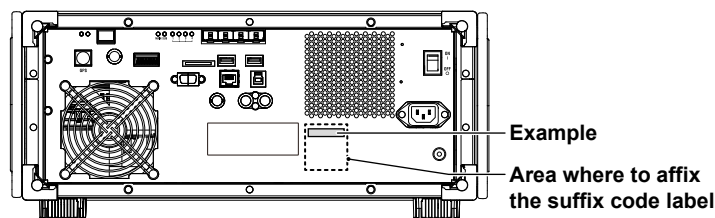

Note

If the suffix code label is not affixed and we need to update the firmware of the relevant product during repairs or other services at our factory, we may not be able to return your product with the added option installed.