



A.H. Systems, Inc.

9710 Cozycroft Ave.
Chatsworth, CA 91311



Tel: (818) 998-0223



sales@AHSystems.com

Fax: (818) 998-6892



www.AHSystems.com

TV-1

Tuned Dipole Antenna 50 MHz – 220 MHz

Efficient performance covering the common
broadcasting frequencies.



Frequency Range: 50 MHz - 220 MHz
Maximum Continuous Power: 60 Watts
Impedance: 50 Ω
Connector: N-Type, Female

Features

- Broad Frequency range of 50 MHz – 220 MHz
- Omni-directional, Receive and Transmit
- Individually Calibrated (1, 3 and 10 Meter calibration included, horizontal polarization)
- Rugged Construction with low balun loss, low VSWR
- FCC Balun Design
- Three Year Warranty

The A.H. Systems' TV-1 antenna provides an accurate standard for precise EMI and site attenuation measurements (per OET-55 and ANSI C63.5). This half wave dipole is an ideal solution for Radio/Television broadcast and land mobile radio engineers. The TV-1 is manufactured per the FCC balun design and individually calibrated.

Recommended Accessories

- ATU-510 (Antenna Tripod, Wooden)
- AEH-510 (Azimuth and Elevation Head)
- PAM-0202 (30 dB Preamplifier)
- SAC-213 (3 Meter N/N cable)



A.H. Systems, Inc.

9710 Cozycroft Ave.
Chatsworth, CA 91311



Tel: (818) 998-0223
Fax: (818) 998-6892


◆ sales@AHSystems.com
◆ www.AHSystems.com



A.H. Systems Inc.

9710 Cozycroft Ave. Chatsworth, CA 91311
Phone (818) 998-0223 Fax (818) 998-6892
E-mail: info@AHSystems.com
Web site: http://www.AHSystems.com

10 Meter Antenna Factor Data Tuned Dipole Set, TV Model TDS-536

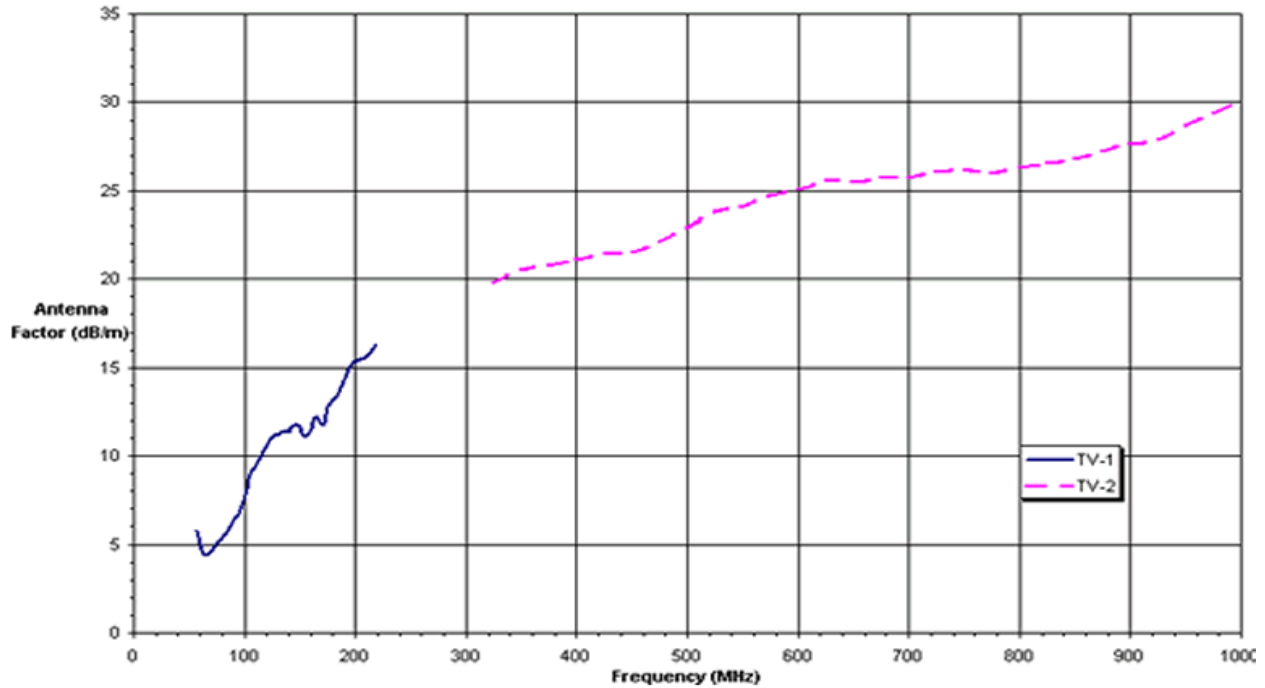

A.H. Systems Inc.

9710 Cozycroft Ave. Chatsworth, CA 91311
Phone (818) 998-0223 Fax (818) 998-6892
E-mail: info@AHSystems.com
Web site: http://www.AHSystems.com

VSWR Tuned Dipole Antenna Model: TV-1

