

Tel: (818) 998-0223 Fax: (818) 998-6892 sales@AHSystems.com

www.AHSystems.com

SAS-510-7

Log Periodic Antenna 290 MHz - 7 GHz

This extended range of this log periodic antenna is a cost-effective solution for higher frequency testing.



Frequency Range: 290 MHz - 7000 MHz

Antenna Factor: 15 - 47 dB

Gain:5.8 dBi

Maximum Continuous Power: 1000 Watts Maximum Radiated Field: 200 V/m

Pattern Type:directional

3dB Beamwidth (E-Field):35° 3dB Beamwidth (H-Field):100°

Impedance: 50 Ω

VSWR:1.65:1 typ. (2.5:1 max)

Connector: N-Type, Female

Mounting Base: 1/4 x 20 Thread, Female

Features

- Frequency Range of 290 MHz to 7000 MHz
- Receive and Transmit
- Individually Calibrated (1, 3 and 10 Meter calibration included, horizontal polarization)
- Rugged Construction
- Three Year Warranty

The A.H. Systems' SAS-510-7 antenna is lightweight, compact and has been manufactured to ensure maximum gain, low VSWR and high-power handling capabilities. Whether testing inside a shielded enclosure or outdoors, this antenna will display efficient performance characteristics through its frequency range.

Recommended Accessories


- ATU-510 (Antenna Tripod, Wooden)
- AEH-510 (Azimuth and Elevation Head)
- PAM-0207A (25 dB Preamplifier)






Tel: (818) 998-0223 Fax: (818) 998-6892 sales@AHSystems.com

www.AHSystems.com

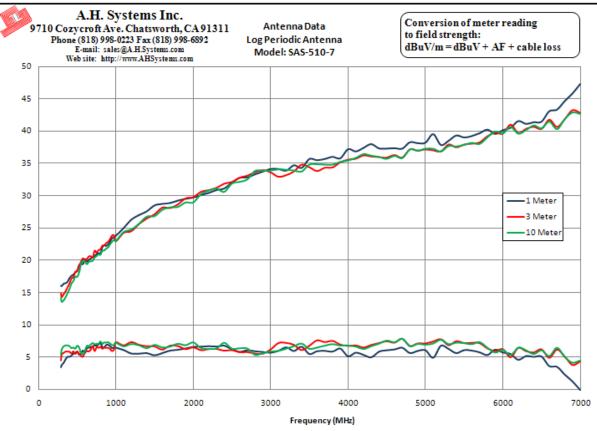

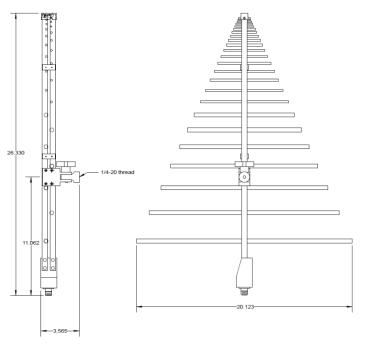

Physical Dimensions

26.3 in. (66.8 cm) Length: Width: 20.1 in. (51.1 cm) Weight: 1.4 lb.'s (0.64 kg)

Information presented in this datasheet was current at the time of publication. A.H. Systems continual product improvement makes it necessary to reserve the right to change our electrical and mechanical specifications without notice.

A.H. Systems











